

LAVATORY SERVICING UNIT ON IVECO DAILY



AS 900C - AS 3000C

These models of Lavatory Service Truck, mounted on industrial chassis IVECO, are designed to ensure an efficient hygienic service to all the types of aircraft, according to high security standards, reliability and hygienic conditions. These models are characterized by the presence of a PLC control which manages, in full security, all the essential functions related to toilette discharging and water supplying.

WASTE WATER CIRCUIT

- Tank made in AISI 304 stainless steel, 3 mm thickness, manhole Ø 500 mm.
- Vacuum Pump with hydraulic control, - 0.60 bar flow 666 l/min (optional)
- Drain valve Ø 4" hydraulic driven
- Flexible spiral hose equipped with aircraft standard connector
- Telescopic extension, rigid connection between the tank and the hose
- Automatic dumping and washing system

WATER CIRCUIT



- Tank made in AISI 304 stainless steel, 2 mm thickness, manhole Ø 500 mm.
- Centrifugal transfer pump, flow rate 90 l/min
- Electrical control circuit for washing with shut-off valve
- Liters counter with predetermination and calculation of quantity in the tank
- Flexible hose for low pressure with a aircraft standard connection
- Sphere valve 1" 1/2 for the total dump of the tank

CHASSIS

- IVECO DAILY 70C15 (AS 3000C)
- IVECO DAILY 35C11 (AS 900C)

WINTER KITS

- Completely closed cabinet made on 40 mm insulated panel over the tanks and equipment
- Warm-up winter kit 220V -40° (engine heater, battery charger, cabin heater, cabinet heater) (Optional)
- WEBASTO heater under the canopy (Optional)

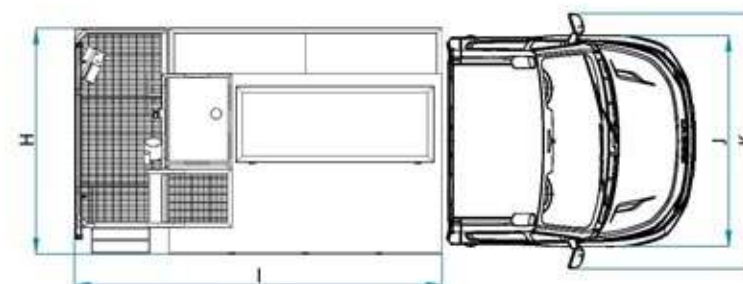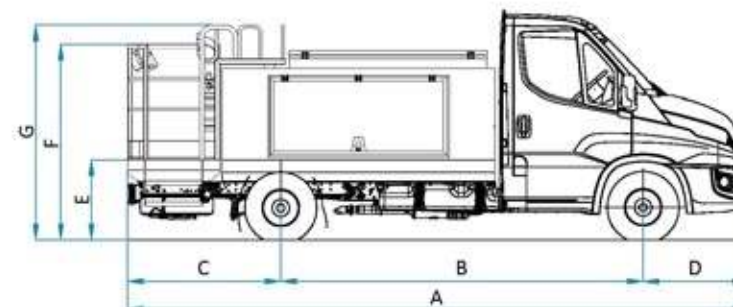

	A	B	C	D	E	F	G	H	I
AS 900C	5914	3450	1460	1004	760	1860	2041	2150	3500
AS 3000C	7345	4350	1991	1004	878	1978	2103	2250	5092
	J	K	(Water Tank)		(Waste Tank)		Min. Weight		
AS 900C	2007	2430	300 Lt		700 Lt		2600 Kg		
AS 3000S	2007	2430	1000 Lt		2000 Lt		3900 Kg		