

# POTABLE WATER UNIT ON IVECO DAILY



# AP 900C - AP 3000C

These models of Potable Water Truck, mounted on industrial chassis IVECO, are designed to ensure an efficient supply of potable water to all the types of aircrafts, according to high security standards, reliability and hygienic conditions. These models are characterized by the presence of a PLC control which manages, in full security, all the essential functions related to supplying the aircrafts with potable water.

## WATER CIRCUIT



- Water tank made in AISI 304 stainless steel, 3 mm thickness, manhole Ø 500 mm.
- Centrifugal transfer pump, flow rate 90 l/min
- Pressure control
- Liters counter with predetermination and calculation of quantity in the tank
- Flexible hose for low pressure with a aircraft standard connection
- Sphere valve 1" 1/2 for the total discharge of the tank
- Plastic housing filter with stainless steel cartridge 70 µ.

## CHASSIS

- IVECO DAILY 70C15 (AP 3000C)
- IVECO DAILY 35C11 (AP 900C)

## WINTER KITS

- Completely closed cabinet made on 40mm insulated panel over the tanks and equipment.
- Warm-up winter kit 220V -40° (engine heater, battery charger, cabin heater, cabinet heater). (Optional)
- WEBASTO heater under the canopy (Optional)

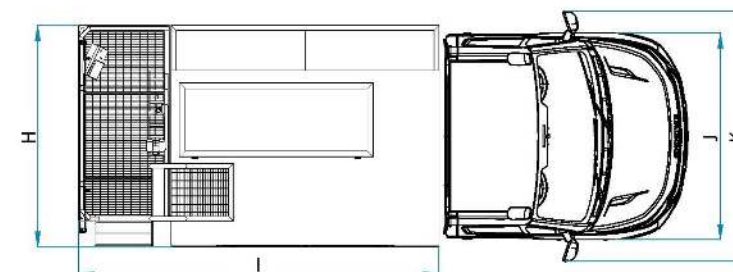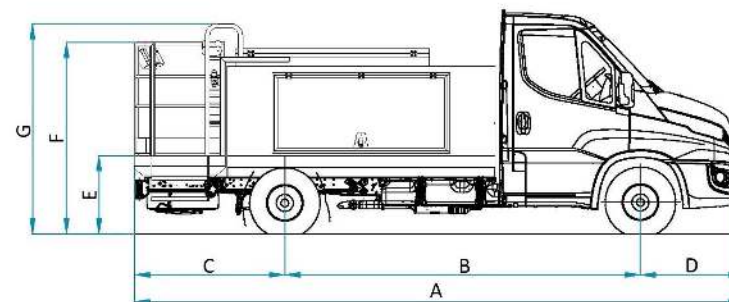

	A	B	C	D	E	F	G	H	I
AP 900C	5914	3450	1460	1004	760	1860	2041	2151	3500
AP 3000C	7345	4350	1991	1004	878	1978	2013	2250	5092
	J	K	(Water Tank)		Min. Weight				
AP 900C	2007	2430	1000 Lt		2600 Kg				
AP 3000C	2007	2430	3000 Lt		3900 Kg				